

In The Claims

This listing of claims will replace all prior versions, and listings, of claims in the application:

Listing of claims:

1. (Original) A material for slush molding, comprising:

a thermoplastic polyurethane resin (A); the difference between the softening starting temperature and the softening ending temperature of said resin (A), by the thermomechanical analysis penetration mode, being from 0 to 30°C, and the softening starting temperature of said resin (A) being from 135 to 200°C.

2. (Original) The material for molding according to claim 1, in which said resin (A) comprises

a polyurethane resin having a hard segment (A1) with a number average molecular weight of 200 to 2000 comprising at least one species selected from the group consisting of a diisocyanate (a1) having a symmetrical structure, a low molecular-weight diamine (a2) having a symmetrical structure, and a low molecular-weight diol (a3); and

a soft segment (A2) having a high molecular-weight diol (a4) with a number average molecular weight of 500 to 5000,

with the content of hard segment in the resin (A) being from 5 to 50% by weight, the content of aromatic rings in the resin (A) being 35% by weight or less, and the content of aromatic rings and the content of urea groups satisfying the following relation (i):

$$-0.1x + 2.5 \leq y \leq -0.1x + 6 \quad (i)$$

wherein x represents the content (% by weight) of aromatic rings in the resin (A), and y the content (% by weight) of urea groups in the resin (A).

3. (Currently Amended) The material for molding according to claim 2, in which

the content x of aromatic rings in the resin (A) is from 5 to 25% by weight, and in which the content of aromatic rings and the content y of urea groups satisfy the following relation (i'):

$$-0.1x + 3 \leq y \leq -0.1x + 5 \quad (i').$$

4. (Currently Amended) The material for molding according to ~~claim 2 or 3~~claim 2, in which

said hard segment (A1) is a hard segment having a number average molecular weight of 200 to 2000 and comprising at least one species selected from the group consisting of a diisocyanate (a1) having a symmetrical structure, a low molecular-weight diamine (a2) having a symmetrical structure, and a low molecular-weight diol (a3') having a symmetrical structure.

5. (Currently Amended) The material for molding according to ~~any one of claims 2 to 4~~claim 2, in which

said diamine (a2) is at least one species selected from the group consisting of straight chain alkylenediamines having a carbon number of 2 to 18, bis(2-aminoethyl) carbonate, 4,4'-dicyclohexylmethanediamine, cyclohexane-1,4-diamine, p-xylylenediamine, $\alpha,\alpha,\alpha',\alpha'$ -tetramethylxylylenediamine, and 4,4'-diamino-diphenylmethane.

6. (Currently Amended) The material for molding according to ~~any one of claims 2 to 5~~claim 2, in which




said diisocyanate (a1) is at least one species selected from the group consisting of 1,2-ethylenediisocyanate, 1,4-tetramethylenediisocyanate, 1,6-hexamethylenediisocyanate, 1,12-dodecamethylenediisocyanate, bis(2-isocyanatoethyl) carbonate, 4,4'-dicyclohexylmethanediisocyanate, cyclohexane-1,4-diisocyanate, p-xylylenediisocyanate, $\alpha,\alpha,\alpha',\alpha'$ -tetramethylxylylenediisocyanate, and 4,4'-diphenylmethanediisocyanate.

7. (Currently Amended) The material for molding according to ~~any one of claims 2 to 6~~claim 2, in which

a residue of said diamine (a2) has the same structure as a residue of said diisocyanate (a1).

8. (Currently Amended) The material for molding according to ~~any one of claims 2 to 7~~claim 2, in which

said diol (a3) is indicated by any one of the general formulas (1), (2), and (3) below:




wherein in the formula (1), Q^1 is a methylene group, 1,4-cyclohexylene group or 1,4-phenylene group, p is 0 or 1, and m is 0 or an integer of 1 to 6 provided that when p is 0 or Q^1 is a 1,4-phenylene group, then m is from 1 to 6, in the formulas (2) and (3), Q^2 is a residue of bisphenols or 1,4-phenylene group, n is an integer of 1 to 3, and in the formula (3), k is 1 or 2, and when Q^2 is a residue of bisphenols, then k is 1.

9. (Currently Amended) The material for molding according to ~~any one of claims 1 to 8~~claim 1, in which

the material comprises said resin (A) and plasticizer (B); the material being a powder with a volume average particle diameter of 100 to 500 μm , and the content of powder particles having a particle diameter of 75 μm or less being 20% by weight or less.


10. (Original) The material for molding according to claim 9, in which
said plasticizer (B) is a phosphoric acid ester indicated by the following general formula (5):

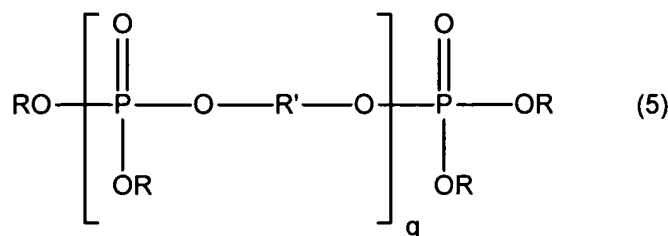

wherein R is a monovalent hydrocarbon group having a carbon number of 1 to 10, which may be substituted with a halogen, a plurality of Rs may be the same or different, R' is a divalent organic group having a carbon number of 2 to 15, which may be substituted with a halogen, and q is an integer of 1 to 6.

11. (Original) The material for molding according to claim 10, in which

R in the general formula (5) is a phenyl group, an alkylphenyl group, or a halogen-substituted phenyl group, and R' is a group indicated by the following general formula (6):



wherein Ph' is 1,4-phenylene group, p is 0 or 1, A is a direct bonding, a methylene group, an isopropylidene group, or SO.

12. (Original) The material for molding according to claim 9, in which

said plasticizer (B) is an aromatic monocarboxylic acid diester of a polyalkylene glycol.




13. (Currently Amended) The material for molding according to ~~any one of claims 1 to 12~~ claim 1, further comprising:

an internal release agent for a slush molding polyurethane surface molding material (C) comprising


at least one species selected from the group consisting of fluorine-modified phosphates (salts) (f) indicated by the general formula (11) and modified silicones containing a polar group (c):

the modified silicones containing a polar group (c) being at least one species selected from the group consisting of carboxyl-modified organopolysiloxanes (c1) indicated by the general formula (8), epoxy-modified organopolysiloxanes (c2) indicated by the general formula


(9), and ether-modified organopolysiloxanes (c3) indicated by the general formula (10);

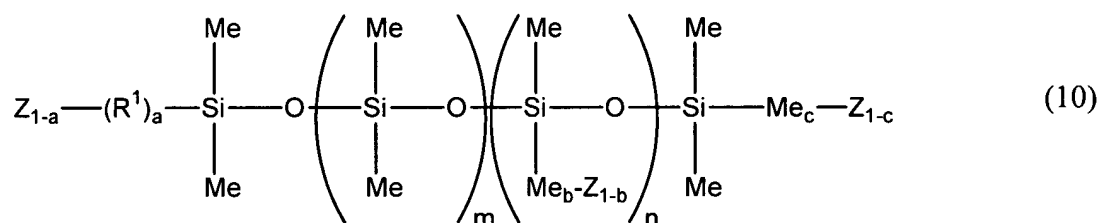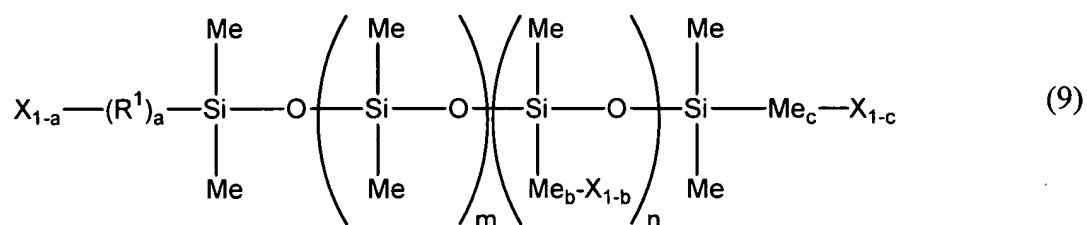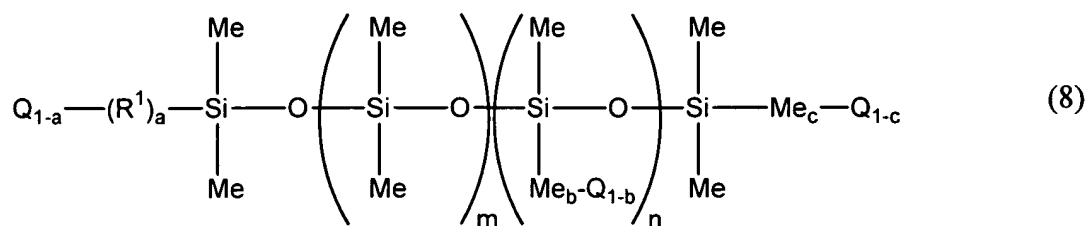

wherein in the formulas (8) to (10), Q is a carboxyl group indicated by $-R^2\text{COOH}$, X is an epoxy group indicated by

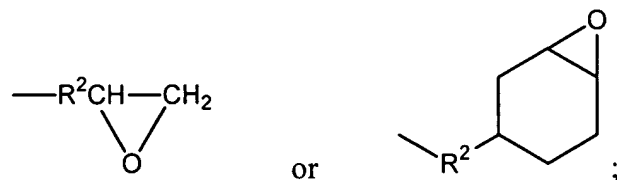

Z is a polyether group indicated by



R^1 is an alkyl group having a carbon number of 1 to 4, R^2 is an alkylene group having a carbon number of 1 to 4, R^3 is H, an alkyl group having a carbon number of 1 to 4, or an acetyl group, and Me is a methyl group; a, b, and c each are 0 or 1, respectively, and when $a = 1$, and $b = 1$, then $c = 0$; m and n are numbers that satisfy the conditions that $(m + n)$ is from 10 to 200, and $n/(m + n)$ is from 0 to 0.5; p and q are numbers that satisfy the conditions that $(p + q)$ is from 3 to 100, and $p/(p + q)$ is from 0 to 0.6; in the formula (11), R_f is a perfluoroalkyl group having a

carbon number of 4 to 20; D is a divalent organic group indicated by $-\text{CH}_2\text{CH}(\text{E})\text{C}_s\text{H}_{2s}-$ or $-\text{SO}_2\text{N}(\text{R}_4)\text{C}_t\text{H}_{2t}-$, wherein E is H, CH_3 , C_2H_5 , Cl or OR^5 (R^5 is H, CH_3 , C_2H_5 , COCH_3 , COC_2H_5 , or CH_2COOH or salts thereof), s is an integer of 0 to 4, R^4 is an alkyl group having a carbon number of 1 to 4, and t is an integer of 1 to 4; and r is an integer of 2 or 3.

14. (Original) The material for molding according to claim 13, in which the internal release agent (C) comprises a single species selected from the group consisting of carboxyl-modified organopolysiloxanes (c1) and ether-modified organopolysiloxanes (c3), a combination of at least one species selected from the group consisting of carboxyl-modified organopolysiloxanes (c1), epoxy-modified organopolysiloxanes (c2) and ether-modified organopolysiloxanes (c3), and fluorine-modified phosphates (salts) (f), or a combination of carboxy-modified organopolysiloxanes (c1) and ether-modified organopolysiloxanes (c3).

15. (Currently Amended) The material for molding according to ~~any one of claims 1 to 14~~claim 1, in which the material further comprises an additive (D).

16. (Currently Amended) A slush molded article produced by heat molding a material for slush molding of ~~any one of claims 1 to 15~~claim 1

17. (Currently Amended) A slush molded skin for an automobile interior produced by heat molding a material for slush molding of ~~any one of claims 1 to 15~~claim 1.

18. (Original) An automobile interior material comprising a slush molded skin of claim 17.

19. (Currently Amended) The material for slush molding according to ~~any one of claims 1 to 15~~claim 1, in which

said resin (A) has the glass transition temperature of from -60°C to -35°C, and the material is a material for molding an instrument panel skin integrally having air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face.

20. (Original) An automobile instrument panel skin which is produced by molding a material for molding of claim 19 and which integrally has air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face.


21. (Original) A method for producing an automobile instrument panel skin integrally having air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face, comprising:

heat molding the material for molding of claim 19, and

forming a tear line for tear opening air bag door sections on the molded product obtained in said heat molding step so that the tear line does not appear on the design face.

22. (New) The material for molding according to claim 2, in which the material comprises said resin (A) and plasticizer (B); the material being a powder with a volume average particle diameter of 100 to 500 μm , and the content of powder particles having a particle diameter of 75 μm or less being 20% by weight or less.

23. (New) The material for molding according to claim 22, in which said plasticizer (B) is a phosphoric acid ester indicated by the following general formula (5):

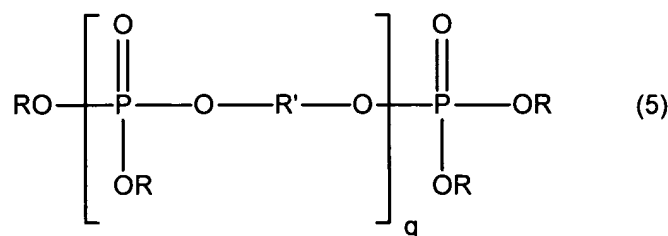


wherein R is a monovalent hydrocarbon group having a carbon number of 1 to 10, which may be substituted with a halogen, a plurality of Rs may be the same or different, R' is a divalent

organic group having a carbon number of 2 to 15, which may be substituted with a halogen, and q is an integer of 1 to 6.

24. (New) The material for molding according to claim 23, in which

R in the general formula (5) is a phenyl group, an alkylphenyl group, or a halogen-substituted phenyl group, and R' is a group indicated by the following general formula (6):



wherein Ph' is 1,4-phenylene group, p is 0 or 1, A is a direct bonding, a methylene group, an isopropylidene group, or SO.

25. (New) The material for molding according to claim 22, in which

said plasticizer (B) is an aromatic monocarboxylic acid diester of a polyalkylene glycol.

26. (New) The material for molding according to claim 2, further comprising:

an internal release agent for a slush molding polyurethane surface molding material (C) comprising

at least one species selected from the group consisting of fluorine-modified phosphates (salts) (f) indicated by the general formula (11) and modified silicones containing a polar group (c):


the modified silicones containing a polar group (c) being at least one species



selected from the group consisting of carboxyl-modified organopolysiloxanes (c1)

indicated by the general formula (8), epoxy-modified organopolysiloxanes (c2)


indicated by the general formula (9), and ether-modified organopolysiloxanes (c3)

indicated by the general formula (10);

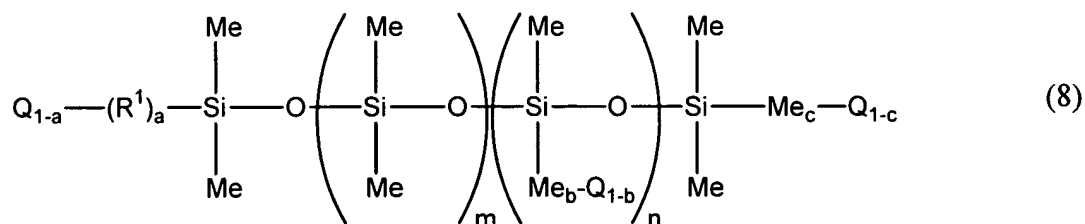


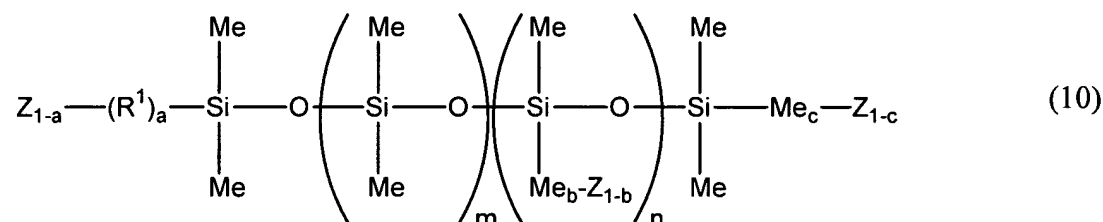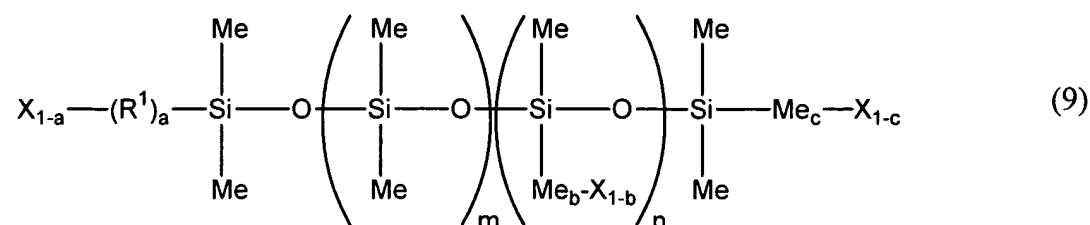

wherein in the formulas (8) to (10), Q is a carboxyl group indicated by $-\text{R}^2\text{COOH}$, X is an epoxy group indicated by

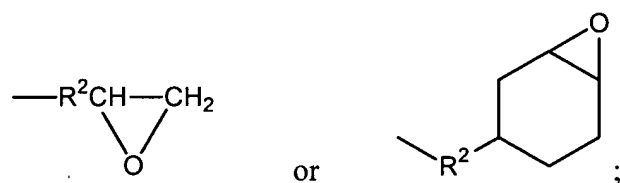

Z is a polyether group indicated by



R^1 is an alkyl group having a carbon number of 1 to 4, R^2 is an alkylene group having a carbon number of 1 to 4, R^3 is H, an alkyl group having a carbon number of 1 to 4, or an acetyl group, and Me is a methyl group; a, b, and c each are 0 or 1, respectively, and when $a = 1$, and $b = 1$, then $c = 0$; m and n are numbers that satisfy the conditions that $(m + n)$ is from 10 to 200, and $n/(m + n)$ is from 0 to 0.5; p and q are numbers that satisfy the conditions that $(p + q)$ is from 3 to 100, and $p/(p + q)$ is from 0 to 0.6; in the formula (11), R_f is a perfluoroalkyl group having a carbon number of 4 to 20; D is a divalent organic group indicated by $-\text{CH}_2\text{CH}(\text{E})\text{C}_s\text{H}_{2s}-$ or $-\text{SO}_2\text{N}(\text{R}_4)\text{C}_t\text{H}_{2t}-$, wherein E is H, CH_3 , C_2H_5 , Cl or OR^5 (R^5 is H, CH_3 , C_2H_5 , COCH_3 , COC_2H_5 , or CH_2COOH or salts thereof), s is an integer of 0 to 4, R^4 is an alkyl group having a carbon number of 1 to 4, and t is an integer of 1 to 4; and r is an integer of 2 or 3.

27. (New) The material for molding according to claim 26, in which the internal release agent (C) comprises a single species selected from the group consisting of carboxyl-modified organopolysiloxanes (c1) and ether-modified organopolysiloxanes (c3), a combination of at least one species selected from the group consisting of carboxyl-modified organopolysiloxanes (c1), epoxy-modified organopolysiloxanes (c2) and ether-modified organopolysiloxanes (c3), and fluorine-modified phosphates (salts) (f), or a combination of carboxy-modified organopolysiloxanes (c1) and ether-modified organopolysiloxanes (c3).

28. (New) The material for molding according to claim 2, in which the material further comprises an additive (D).

29. (New) A slush molded article produced by heat molding a material for slush molding of claim 2.

30. (New) A slush molded skin for an automobile interior produced by heat molding a material for slush molding of claim 2.

31. (New) An automobile interior material comprising a slush molded skin of claim 30.

32. (New) The material for slush molding according to claim 2, in which said resin (A) has the glass transition temperature of from -60°C to -35°C, and the material is a material for molding an instrument panel skin integrately having air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face.

33. (New) An automobile instrument panel skin which is produced by molding a material for molding of claim 32 and which integrately has air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face.

34. (New) A method for producing an automobile instrument panel skin integratedly having air bag door sections formed in such a way that a tear line for tear opening does not appear on the design face, comprising:

heat molding the material for molding of claim 32, and

forming a tear line for tear opening air bag door sections on the molded product obtained in said heat molding step so that the tear line does not appear on the design face.